

VDW 6035

Options Optionen

- > Hydraulic or electric shifting
Hydraulische oder elektrische
Schaltung
- > Mounting plates
Montageplatten
- > Speed measuring
Drehzahlmessung
- > Pendulum part
Kardangelenk



X-SERIES



VIBRATION HEADS



CORING HEADS



DOUBLE HEAD
DRILLING SYSTEMS




ROTARY HEADS
FOR PILE RIGS




DRILLING
ACCESSORIES

3336

STROKE/HUB 300

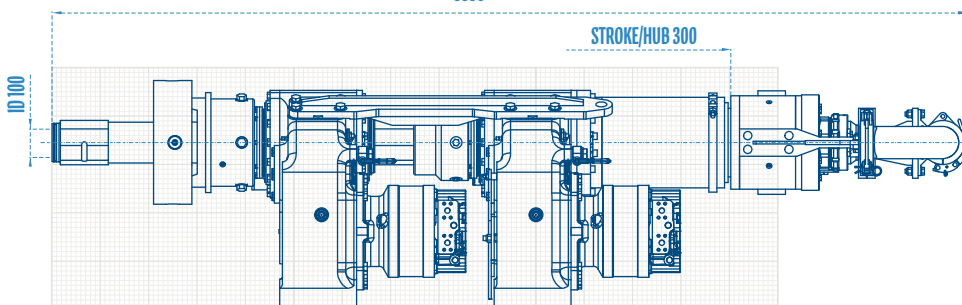

up to - bis zu
Distance to wall
225 MM
Wandabstand

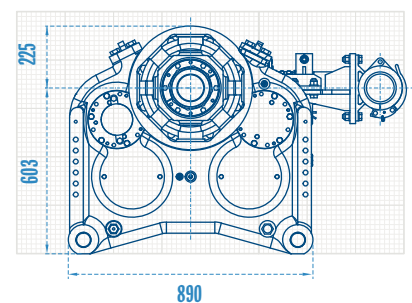

Technical Specifications are subject to modifications without prior notice and incurring responsibility for machines previously sold. The shown machines may have optional equipment. Technical data do not consider power losses. Error misprints reserved. / Technische Änderungen ohne Vorankündigung und Verpflichtung gegenüber früher gelieferten Geräten. Die abgebildeten Geräte können Sonderausstattungen haben. Technische Daten ohne Berücksichtigung des Wirkungsgrades. Irrtum und Druckfehler vorbehalten.



3400 kg **Weight** Gewicht · 450 kN **Traction** Zugkraft

Gear box 1 / Casing VDW 6035 Getriebe 1 / Rohr

Motor Type Motor Typ Gear Gang	1 x 420		2 x 315		2 x 420	
	1	2	1	2	1	2
Torque Drehmoment	42	21	62	31	83	41.5
Rotation Drehzahl	24	48	33	66	24	48
p = 320 bar & Q = 200 l/min			p = 320 bar & Q = 400 l/min			

Gear box 2 / Auger VDW 6035 Getriebe 2 / Schnecke

Motor Type Motor Typ Gear Gang	1 x 315		1 x 420		2 x 315	
	1	2	1	2	1	2
Torque Drehmoment	31	15.5	42	21	62	31
Rotation Drehzahl	33	66	24	48	33	66
p = 320 bar & Q = 200 l/min				p = 320 bar & Q = 400 l/min		